



Handwritten signature/initials

#5

PATENT

Agent's Docket No. 11590-US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Gary Q. Jin

09/925485

Serial No: 0019545.3

Filed: 10-August-2000

Art Unit: 2631

Examiner:

For: COMBINATION REED-SOLOMON AND TURBO CODING

November 5, 2001

Commissioner of Patent and Trademarks

Washington, D.C. 20231

TRANSMITTAL LETTER

Sir:

Submitted herewith are the following documents:

- Certified Copy of Priority Document (British Application No. 0019545.3)

Respectfully submitted,

Handwritten signature of Richard J. Mitchell

BY: Richard J. Mitchell
Reg. No. 34,519
Agent of Record

MARKS & CLERK
P. O. Box 957, Station B
Ottawa, Ontario Canada K1P 5S7 (613) 236-9561

RECEIVED
APR 05 2002
Technology Center 2100



RECEIVED
APR 04 2002
Technology Center 2600



1

2

#5

TRANSMITTAL LETTER (General - Patent Pending)			Docket No. 11590-US
In Re Application Of: <div style="text-align: center; margin-top: 10px;">Gary Q. Jin</div>			
Serial No. 00195453 09/925485	Filing Date August 10, 2000	Examiner	Group Art Unit 2631
Title: COMBINATION REED-SOLOMON AND TURBO CODING			
		RECEIVED APR 05 2002 Technology Center 2100	
<u>TO THE COMMISSIONER OF PATENTS AND TRADEMARKS:</u>			
Transmitted herewith is: CERTIFIED COPY OF PRIORITY DOCUMENT BRITISH PATENT APPLICATION NO. 0019545.3			
in the above identified application.			
<div style="display: flex; flex-direction: column; gap: 5px;"><div><input checked="" type="checkbox"/> No additional fee is required.</div><div><input type="checkbox"/> A check in the amount of _____ is attached.</div><div><input type="checkbox"/> The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.<div style="margin-left: 20px;"><div><input type="checkbox"/> Charge the amount of</div><div><input type="checkbox"/> Credit any overpayment.</div><div><input type="checkbox"/> Charge any additional fee required.</div></div></div></div>			
 _____ <i>Signature</i>		Dated: 5-November-2001	
Richard J. Mitchell MARKS & CLERK P.O. Box 957, Station B Ottawa, Ontario K1P 5S7 Canada Tel: (613) 236-9561		34,519	
CC:		<div style="border: 1px solid black; padding: 5px;"><div>I certify that this document and fee is being deposited on _____ with the U.S. Postal Service as first class mail under 37 C.F.R. 1.8 and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.</div><div style="border-top: 1px solid black; height: 30px; margin-top: 10px;"></div><div style="border-top: 1px solid black; height: 30px; margin-top: 10px;"></div></div>	





INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED

APR 04 2002

Technology Center 2600

RECEIVED

APR 05 2002

Technology Center 2100

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**


Signed

JEvens.

Dated 3 September 2001

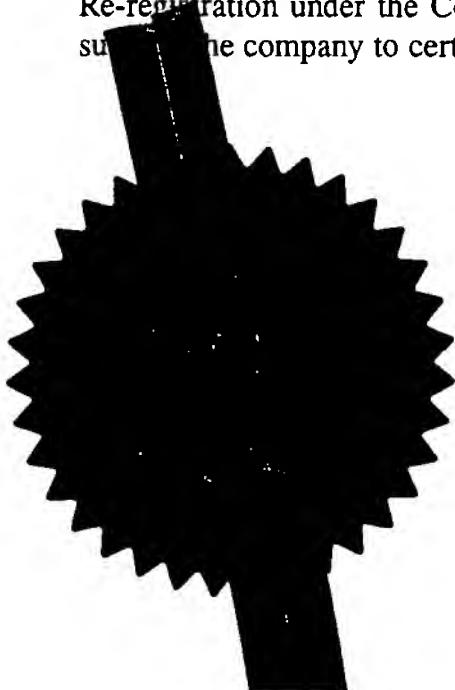

This Page Blank (uspto)

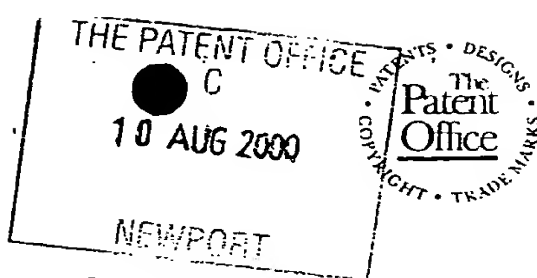

10AUG00 5559528-1 001063
POL/7700 0.00-0019545.3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

RPH.P51265GB

0019545.3

2. Patent application number

(The Patent Office will fill in this part)

10 AUG 2000

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Mitel Corporation
PO Box 13089, 350 Legget Drive
Kanata, Ontario, K2K 2W7
Canada

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

Canada

607630006

4. Title of the invention

"Combination Reed-Solomon and Turbo Coding"

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Marks & Clerk
4220 Nash Court
Oxford Business Park South
Oxford
OX4 2RU

Patents ADP number (*if you know it*)

727 1125 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

6

Claim(s)

8

Abstract

1

Drawing(s)

3 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Mark A Clerk

Date

Marks & Clerk

7 August 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

Richard Harding - 01865 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

COMBINATION REED-SOLOMON AND TURBO CODING

The present invention relates to a data communication system with a combination trellis/Reed-Solomon encoder/decoder and in particular to a decoder wherein partial results from the Reed-Solomon decoder are used in determining whether to stop the trellis decoder from performing additional iterations.

In the field of data communication recent efforts have been made to increase the rate of data transmission without sacrificing the available bandwidth. As a result, high level modulation schemes, e.g. Quadrature Amplitude Modulation, have been developed.

Unfortunately, these high level modulation schemes are greatly effected by noise and other
 10 transmission factors. Accordingly, several error correcting techniques have been utilized to minimize or eliminate errors created by these factors. Trellis codes, e.g. turbo codes, are useful in correcting errors caused by noise etc, however, they are susceptible to producing burst errors. To combat these burst errors, conventional devices utilize Reed-Solomon techniques in combination with the trellis codes. Several attempts have been made to increase the efficiency of combined Reed-Solomon and trellis codes, such as those disclosed in United States Patents Nos. 3,988,677 (Fletcher et al), 5,511,096 (Huang & Heegard), 5,363,408 (Paik et al), and 6,034,996 (Herzberg).

Typically, trellis codes are designed for the worst case scenario and, therefore, require several iterations to produce a high performance output. However, a trellis code is a block
 20 operation code and in many cases the latter iterations are overkill. Moreover, in most cases only a few iterations are required to obtain the desired signal-to-noise ratio (SNR) performance. The trellis decoder always consumes a great deal of power in the chip. Accordingly, it would be highly advantageous if the number of iterations performed could be adaptively controlled. However, the decoders themselves have no mechanism to stop before all of the programmed iterations are performed. On the other hand, Reed-Solomon decoders have the ability to detect the number of error bits in the received data.

An object of the present invention is to combine the power of trellis codes and the error detection feature of the Reed-Solomon codes, whereby a desired bit error rate (BER) is achieved using the minimum number of iterations.

Accordingly, the present invention relates to a decoder for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded, comprising: a trellis decoder for performing at least one iteration for decoding the stream of data; a Reed-Solomon decoder for further decoding the encoded stream of data after the trellis decoder is stopped, and including syndrome calculating means for calculating syndromes after every iteration of the trellis decoder; and control means for
10 stopping the trellis decoder from performing another iteration when all of the syndromes calculated in the syndrome calculation means are zero.

Another aspect of the invention relates to a method for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded, comprising the steps of: trellis decoding the stream of data during at least one iteration through a trellis decoder; calculating Reed-Solomon syndromes after every iteration of the trellis decoder; stopping the trellis decoder from performing another iteration if all of the Reed-Solomon syndromes are zero; and Reed-Solomon decoding the encoded stream of data, after the trellis decoder is stopped, in a Reed-Solomon decoder.

The invention will be described in greater detail with reference to the accompanying
20 drawings, which illustrate preferred embodiments of the invention and wherein:

Figure 1 is a block diagram of a conventional trellis/Reed-Solomon encoder;

Figure 2 is a block diagram of a conventional trellis/Reed-Solomon decoder;

Figure 3 is a block diagram of a conventional trellis decoder;

Figure 4 is a block diagram of a conventional Reed-Solomon decoder;

Figure 5 is a block diagram of a combined Reed-Solomon/trellis decoder according to a first embodiment of the present invention;

Figure 6 is a block diagram of a combined Reed-Solomon/trellis decoder according to a second embodiment of the present invention; and

Figure 7 is a block diagram of a combined Reed-Solomon/trellis decoder according to a third embodiment of the present invention.

As seen in Figure 1, in a conventional transmitter the Reed-Solomon (RS) encoder 1 precedes the trellis encoder 2, and the two encoders are dealt with separately. The RS encoder 1 takes a block of data, grouped into bytes and combined with a certain number of error-checking data bytes, created by passing all data bytes through an encoder polynomial $g(X)$. The output of the RS encoder 1 is also byte oriented. The data is then passed through a parallel to series shift register 3, which takes the data bytes, converts them into data bits, and transfers the data bits to the trellis encoder 2. In the illustrated systems, both conventional and novel, the trellis encoder and decoder is a turbo encoder/and turbo decoder, respectively.

The turbo encoder 2 includes a first encoder 4, which receives normal data input, and a second encoder 6, which receives interleaved data input. The data is passed through an interleaver 7 before reaching the encoder 6. The output of the turbo encoder 2 consists of straight data X , encoded data Y_1 , and interleaved encoded data Y_2 .

The conventional receiver (Figure 2) includes a turbo decoder 8, a bit-byte shift register 9, and a RS decoder 11.

With reference to Figure 3, the turbo decoder includes a first decoder 12, which receives the transmitted data X and Y_1 . The output of the first decoder 12 is transferred through an interleaver 13, similar to interleaver 7, to a second decoder 14. The second decoder 14 also receives the transmitted data Y_2 . The output of the second decoder 14 is transferred through a de-interleaver 16 and back to the first decoder 12 for another iteration. Both decoders take soft input and produce soft output. After a certain number of iterations

the soft output is transferred through the gate 17 to decision block 18, where a bit decision will be made based on the soft output.

As stated above, the bit stream output from the turbo decoder 8 passes through the shift register 9 and becomes byte oriented output, which will be sent to the RS decoder 11.

The first stage of the RS decoder (Figure 4) is syndrome calculation 19, wherein a set of cumulative "sums" of the data in a given RS block is computed. The number of syndromes is equal to the number of error-checking data bytes in the block. If all the syndromes are equal to zero the RS decoder will stop immediately, since this indicates that no error has been detected.

10 The second stage 21 consists of computing an error locator polynomial, using the syndromes to determine the coefficients thereof. The error locations are determined by evaluating the error locator polynomial. If the number of errors is less than half of the number of error check bytes in the RS code word, the error locator polynomial will give all of the error locations. Otherwise, an "uncorrectable error" indicator 22 will be given, which indicates that the number of errors in the RS code word is too large to be corrected by the RS decoder.

In the next stage 23, the magnitudes of the errors are calculated using the error syndromes and the roots of the error locator polynomial.

20 In the final stage 24, the error magnitudes are used to convert the corrupted transmitted data back into the original data.

According to the present invention, instead of running the turbo decoder and the RS decoder independently, initial results from the RS decoder are used to control the number of iterations performed by the turbo decoder, thereby reducing the power consumed by unnecessary iterations.

According to the first embodiment of the present invention (see Figure 5), the turbo decoder 8 functions the same way as the conventional turbo decoder discussed above, using a

first decoder 12, an interleaver 13, a second decoder 14, a de-interleaver 16, and a decision block 18.

As before a bit-to-byte shift register 9 converts the data bits into data bytes for transmission to the RS decoder 11. However, unlike the conventional decoders, a logic control circuit 26 is connected between the turbo decoder 8 and the RS decoder 11, whereby the turbo decoder 8 will be stopped if any one of the following conditions is satisfied: 1) All of the syndromes calculated during the syndrome calculation step 19 are zero; 2) The uncorrectable error indicator 22 from the error locator polynomial stage 21 is zero, which indicates that even if there are errors in the turbo-decoder output, all of the errors in the code word are correctable by the RS decoder; and 3) The turbo decoder has already performed a given number of iterations.

The advantage of this embodiment is that the turbo decoder 8 can be stopped even if its output contains errors. Accordingly, in most cases, only one iteration of the turbo decoder will be enough. However, the disadvantage of this scheme is that half of the required RS decoder operation has to be done for each turbo-decoder iteration.

With reference to Figure 6, the second embodiment of the present invention differs from the first embodiment in that decoding in the second decoder 14 is done before decoding in the first decoder 12. This arrangement enables the data output from the first decoder 12 to be fed immediately to the RS decoder 11, in which the syndrome calculation can begin as soon as the first byte is outputted. Moreover, the syndrome calculation is completed at approximately the same time as the turbo-decoder iteration. In the previous embodiment all of the data would be de-interleaved in de-interleaver 16 before syndrome calculation could begin. In this embodiment the output of the first decoder is not interleaved until it is fed back to the second decoder 14. A logic control circuit 27 of this embodiment stops the turbo decoder if either one of the following conditions is satisfied: 1) All of the syndromes in the

RS decoder are zero; 2) The turbo decoder has already performed a given number of iterations. As shown in Figure 6, X data is interleaved in interleaver 32 before decoder 2.

The advantage of this embodiment is that it utilizes less circuitry for each iteration but results in, on average, an increase in the number of iterations required.

The third embodiment, as seen in Figure 7, is very similar to the second embodiment except that instead of using the results of the syndrome calculations, a polynomial division circuit 28 using the RS generator polynomial $g(X)$ is used, whereby if there is no errors in the data word, after all received data bytes, including error check bytes, are shifted into the division circuit, all the registers in the division polynomial $g(X)$ should contain only zeros.

10 Accordingly, a control logic circuit 29 of this embodiment will stop the turbo decoder 8 if either the output of the division circuit 28 is zero after the whole data block is shifted in or the turbo decoder has already performed a given number of iterations. The polynomial division circuit is much simpler than the syndrome calculation and the average number of turbo decoder iterations for this scheme is the same as for the previous scheme but an extra polynomial division circuit is required. However, if the turbo decoder iterations are stopped because the division circuit 28 indicates that the code word is error free, the RS decoder operation can be bypassed through gate 31 to reduce power consumption.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A decoder for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded, comprising:
a trellis decoder for performing at least one iteration for decoding the stream of data;
a Reed-Solomon decoder for further decoding the encoded stream of data after the trellis decoder is stopped, and including syndrome calculating means for calculating syndromes after every iteration of the trellis decoder; and
control means for stopping the trellis decoder from performing another iteration when all of the syndromes calculated in the syndrome calculation means are zero.

2. The decoder according to claim 1, wherein said trellis decoder is a turbo decoder.

3. The decoder according to claim 2, wherein said turbo decoder is adapted to receive a stream of data from a transmitter, which includes a first encoder with normal data input, and a second encoder with interleaved data input, the transmitter output comprising X , representing the data as input; Y_1 , representing the data turbo encoded; and Y_2 , representing the data interleaved and turbo encoded; and
wherein the turbo decoder comprises:

a first decoder, receiving X and Y_1 after transmission from the transmitter;
an interleaver for interleaving output from the first decoder;
a second decoder receiving output from the interleaver and Y_2 , after transmission from the transmitter; and
a de-interleaver for de-interleaving output from the second decoder;
wherein output from the de-interleaver is fed back to the first decoder for another iteration through the turbo decoder unless all of the syndromes calculated in the syndrome calculation means are zero.

4. The decoder according to claim 3, wherein the Reed-Solomon decoder further comprises uncorrectable error indicator means for providing an indication, after every iteration, that output from the turbo decoder contains errors that can not be corrected by the Reed-Solomon decoder; and wherein said control means stops the turbo decoder from performing another iteration if the uncorrectable error indicator means indicates that output from the turbo decoder does not contain any uncorrectable errors.

5. The decoder according to claim 2, wherein said turbo decoder is adapted to receive a stream of data from a transmitter, which includes a first encoder with normal data input, and a second encoder with interleaved data input, the transmitter output comprising X , representing the data as input; Y_1 , representing the data turbo encoded; and Y_2 , representing the data interleaved and turbo encoded; and wherein said turbo decoder comprises:

- a first decoder, receiving X and Y_2 after transmission from the transmitter;
- a de-interleaver for de-interleaving output from the first decoder;
- a second decoder, receiving output from the de-interleaver and Y_1 , after transmission from the transmitter; and
- an interleaver for interleaving output from the second decoder for input into the first decoder for another iteration through the turbo decoder;

whereby output from the second decoder is received in the Reed-Solomon decoder without having to be de-interleaved, thereby enabling the syndrome calculations means to finish calculating syndromes at substantially the same time as the turbo decoder finishes an iteration.

6. A decoder for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded, comprising:
a trellis decoder for performing at least one iteration for decoding the stream of data;
a division circuit means using Reed-Solomon polynomial $g(x)$; and

control means for stopping the trellis decoder from performing another iteration when all the registers in the division polynomial $g(X)$ should contain only zeros after the entire turbo decoded data stream is shifted therein; and
a Reed-Solomon decoder for further decoding the encoded stream of data after the trellis decoder is stopped.

7. The decoder according to claim 6, wherein the Reed-Solomon decoder is bypassed if the turbo decoder is stopped when all the registers in the division polynomial $g(X)$ are zeros after the entire turbo decoded data stream is shifted in.

8. The decoder according to any one of claims 1 to 7, further comprising a bit-to-byte shift register between said trellis decoder and said Reed-Solomon decoder for converting output from the trellis decoder from bits to bytes, which are input into the Reed-Solomon decoder.

9. The decoder according to any one of claims 1 to 8, wherein said control means stops the trellis decoder from performing another iteration if the trellis decoder has already performed a preset number of iterations.

10. A method for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded, comprising the steps of: trellis decoding the stream of data during at least one iteration through a trellis decoder; calculating Reed-Solomon syndromes after every iteration of the trellis decoder; stopping the trellis decoder from performing another iteration if all of the Reed-Solomon syndromes are zero; and
Reed-Solomon decoding the encoded stream of data, after the trellis decoder is stopped, in a Reed-Solomon decoder.

11. The method according to claim 10, wherein said trellis decoding comprises turbo decoding in a turbo decoder.

12. The method according to claim 11, wherein said turbo decoder is adapted to receive a stream of data from a transmitter, which includes a first encoder with normal data input, and a second encoder with interleaved data input, the transmitter output comprising X, representing the data as input; Y_1 , representing the data turbo encoded; and Y_2 , representing the data interleaved and turbo encoded; and wherein the turbo decoding step comprises:

- decoding X and Y_1 after transmission from the transmitter;
- interleaving output from a first decoder;
- decoding output from the interleaver and Y_2 , after transmission from the transmitter;
- de-interleaving the output; and
- sending output from the de-interleaver back to the first decoder for another iteration through the turbo decoder unless all of the syndromes calculated in the syndrome calculation means are zero.

13. The method according to claim 12, further comprising determining, after every iteration of the turbo decoder, whether the output from the turbo decoder contains errors that can not be corrected by the Reed-Solomon decoder; and stopping the turbo decoder from performing another iteration if the output from the turbo decoder does not contain any uncorrectable errors.

14. The method according to claim 11, wherein said turbo decoder is adapted to receive a stream of data from a transmitter, which includes a first encoder with normal data input, and a second encoder with interleaved data input, the transmitter output comprising X, representing the data as input; Y_1 , representing the data turbo encoded; and Y_2 , representing the data interleaved and turbo encoded; and wherein said turbo decoding step comprises:

- decoding X and Y_2 after transmission from the transmitter;
- de-interleaving output from the first decoder in a de-interleaver;
- decoding output from the de-interleaver and Y_1 , after transmission from the transmitter; and

interleaving output from the second decoder for input into the first decoder for another iteration through the turbo decoder;
whereby output from the second decoder is received in the Reed-Solomon decoder without having to be de-interleaved, thereby enabling the syndrome calculations means to finish calculating syndromes at substantially the same time as the turbo decoder finishes an iteration.

15. A method for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded, comprising:
trellis decoding the stream of data during at least one iteration;
passing the stream of data through a division circuit means using a Reed-Solomon polynomial $g(x)$;
stopping the trellis decoder from performing another iteration when all the registers in the division polynomial $g(X)$ are zeros after the entire data stream is shifted in; and
Reed-Solomon decoding the encoded stream of data after the trellis decoder is stopped.

16. The method according to claim 15, further comprising bypassing the Reed-Solomon decoder if the turbo decoder is stopped when all the registers in the division polynomial $g(X)$ are zeros after the entire data stream is shifted in.

17. The method according to any one of claims 10 to 16, further comprising converting output from the trellis decoder in a bit-to-byte shift register for input into said Reed-Solomon decoder.

18. The method according to any one of claims 10 to 17, further comprising stopping the trellis decoder from performing another iteration if the trellis decoder has already performed a preset number of iterations.

19. A data communication system including:
an encoder comprising:

a Reed-Solomon encoder for encoding a stream of data; and
a trellis encoder for further encoding the Reed-Solomon encoded stream of data; and
a decoder comprising:

a trellis decoder for performing at least one iteration for decoding the stream of data;
a Reed-Solomon decoder for further decoding the encoded stream of data after the
trellis decoder is stopped, and including syndrome calculating means for calculating
syndromes after every iteration of the trellis decoder; and
control means for stopping the trellis decoder from performing another iteration when
all of the syndromes calculated in the syndrome calculation means are zero.

20. The data communication system according to claim 19, wherein the trellis
decoder is a turbo decoder.

21. The data communication system according to claim 20, wherein the turbo
encoder includes:

a first encoder with normal data input; and
a second encoder with interleaved data input;

wherein the transmitter output comprising X , representing the data as input; Y_1 , representing
the data turbo encoded; and Y_2 , representing the data interleaved and turbo encoded.

22. The data communication system according to claim 21, wherein the turbo
decoder comprises:

a first decoder, receiving X and Y_1 after transmission from the transmitter;
an interleaver for interleaving output from the first decoder;
a second decoder receiving output from the interleaver and Y_2 , after transmission from the
transmitter; and
a de-interleaver for de-interleaving output from the second decoder;
wherein output from the de-interleaver is fed back to the first decoder for another iteration
through the turbo decoder unless all of the syndromes calculated in the syndrome calculation
means are zero.

23. The data communication system according to claim 22, wherein the Reed-Solomon decoder further comprises uncorrectable error indicator means for providing an indication, after every iteration, that output from the turbo decoder contains errors that can not be corrected by the Reed-Solomon decoder; and wherein said control means stops the turbo decoder from performing another iteration if the uncorrectable error indicator means indicates that output from the turbo decoder does not contain any uncorrectable errors.

24. The data communication system according to claim 21, wherein said turbo decoder comprises:
a first decoder, receiving X and Y_2 after transmission from the transmitter;
a de-interleaver for de-interleaving output from the first decoder;
a second decoder, receiving output from the de-interleaver and Y_1 , after transmission from the transmitter; and
an interleaver for interleaving output from the second decoder for input into the first decoder for another iteration through the turbo decoder;
whereby output from the second decoder is received in the Reed-Solomon decoder without having to be de-interleaved, thereby enabling the syndrome calculations means to finish calculating syndromes at substantially the same time as the turbo decoder finishes an iteration.

25. A data communication system including:
an encoder comprising:
a Reed-Solomon encoder for encoding a stream of data; and
a trellis encoder for further encoding the Reed-Solomon encoded stream of data; and
a decoder comprising:
a trellis decoder for performing at least one iteration for decoding the stream of data;
a division circuit means using Reed-Solomon polynomial $g(x)$;
control means for stopping the trellis decoder from performing another iteration when

all the registers in the division polynomial $g(X)$ are zeros after the entire data stream is shifted in after the entire decoded data stream is shifted therein; and
a Reed-Solomon decoder for further decoding the encoded stream of data after the trellis decoder is stopped.

26. The data communication system according to claim 25, wherein the Reed-Solomon decoder is bypassed if the turbo decoder is stopped when all the registers in the division polynomial $g(X)$ are zeros after the entire data stream is shifted in.

27. The data communication system according to any one of claims 19 to 26, further comprising:
a byte-to-bit register between said Reed-Solomon encoder and said trellis encoder; and
a bit-to-byte shift register between said trellis decoder and said Reed-Solomon decoder.

28. The data communication system according to any one of claims 19 to 27, wherein said control means stops the trellis decoder from performing another iteration if the trellis decoder has already performed a preset number of iterations.

ABSTRACT

A decoder for use in a data communication system for decoding a stream of data which has been convolutionally and Reed-Solomon encoded is provided. The decoder has a trellis decoder for performing at least one iteration for decoding the stream of data. The Reed-Solomon decoder is provided for further decoding the encoded stream of data after the trellis decoder is stopped, the Reed-Solomon decoder including syndrome calculating means for calculating syndromes after each iteration of the trellis decoder. The decoder also includes control means for stopping the trellis decoder from performing another iteration when all of the syndromes calculated in the syndrome calculation means are zero.

This Page Blank (uspto)

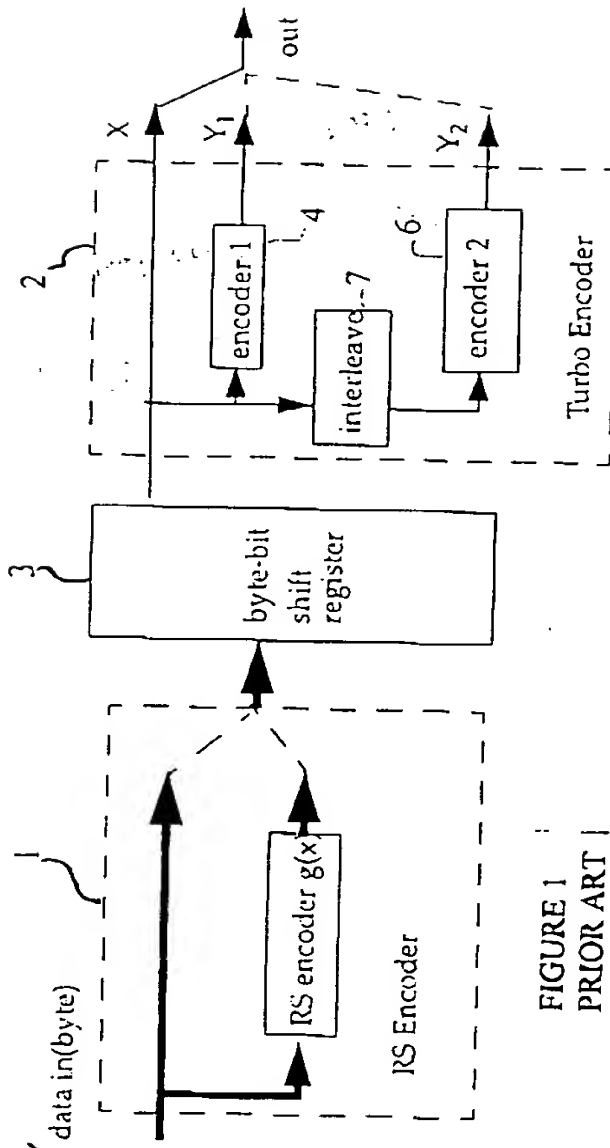


FIGURE 1
PRIOR ART

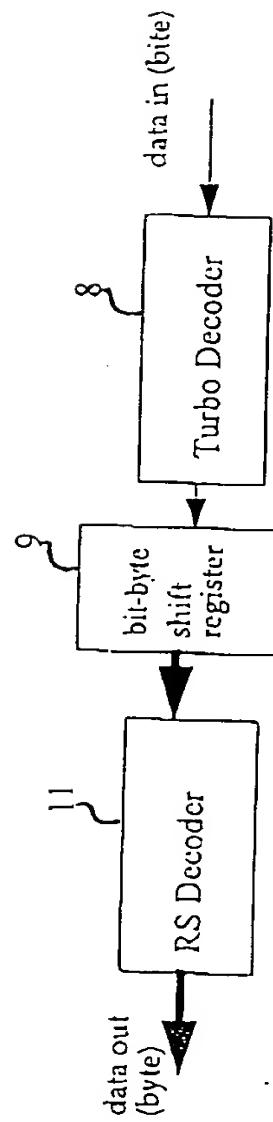


FIGURE 2
PRIOR ART

This Page Blank (uspto)

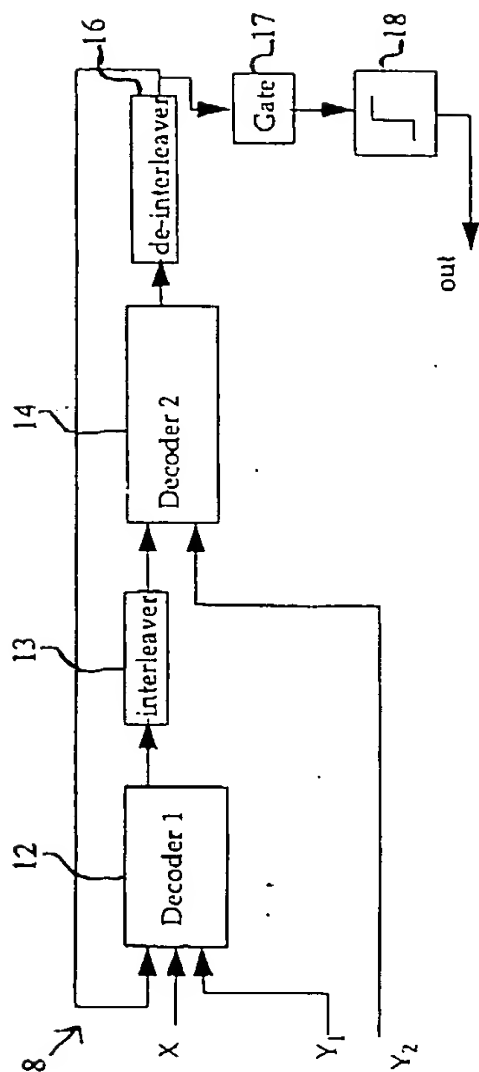


FIGURE 3
PRIOR ART


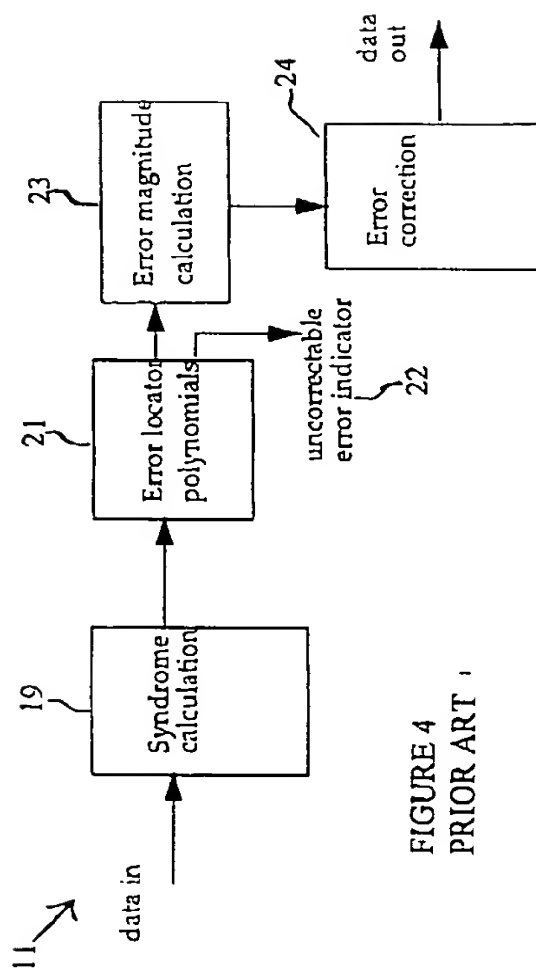


FIGURE 4
PRIOR ART

This Page Blank (uspto)

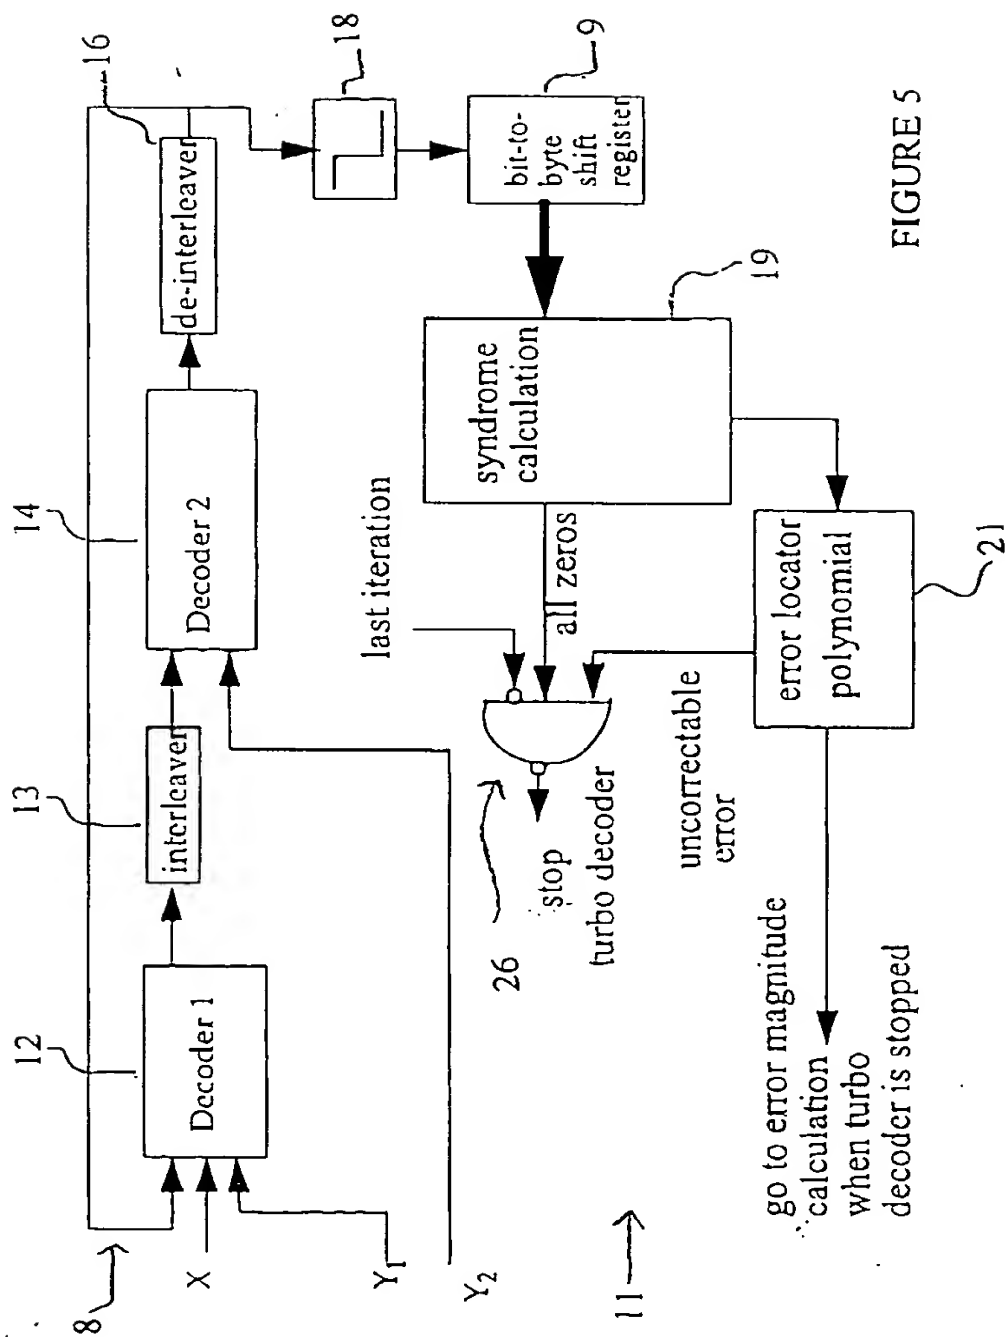

This Page Blank (uspto)


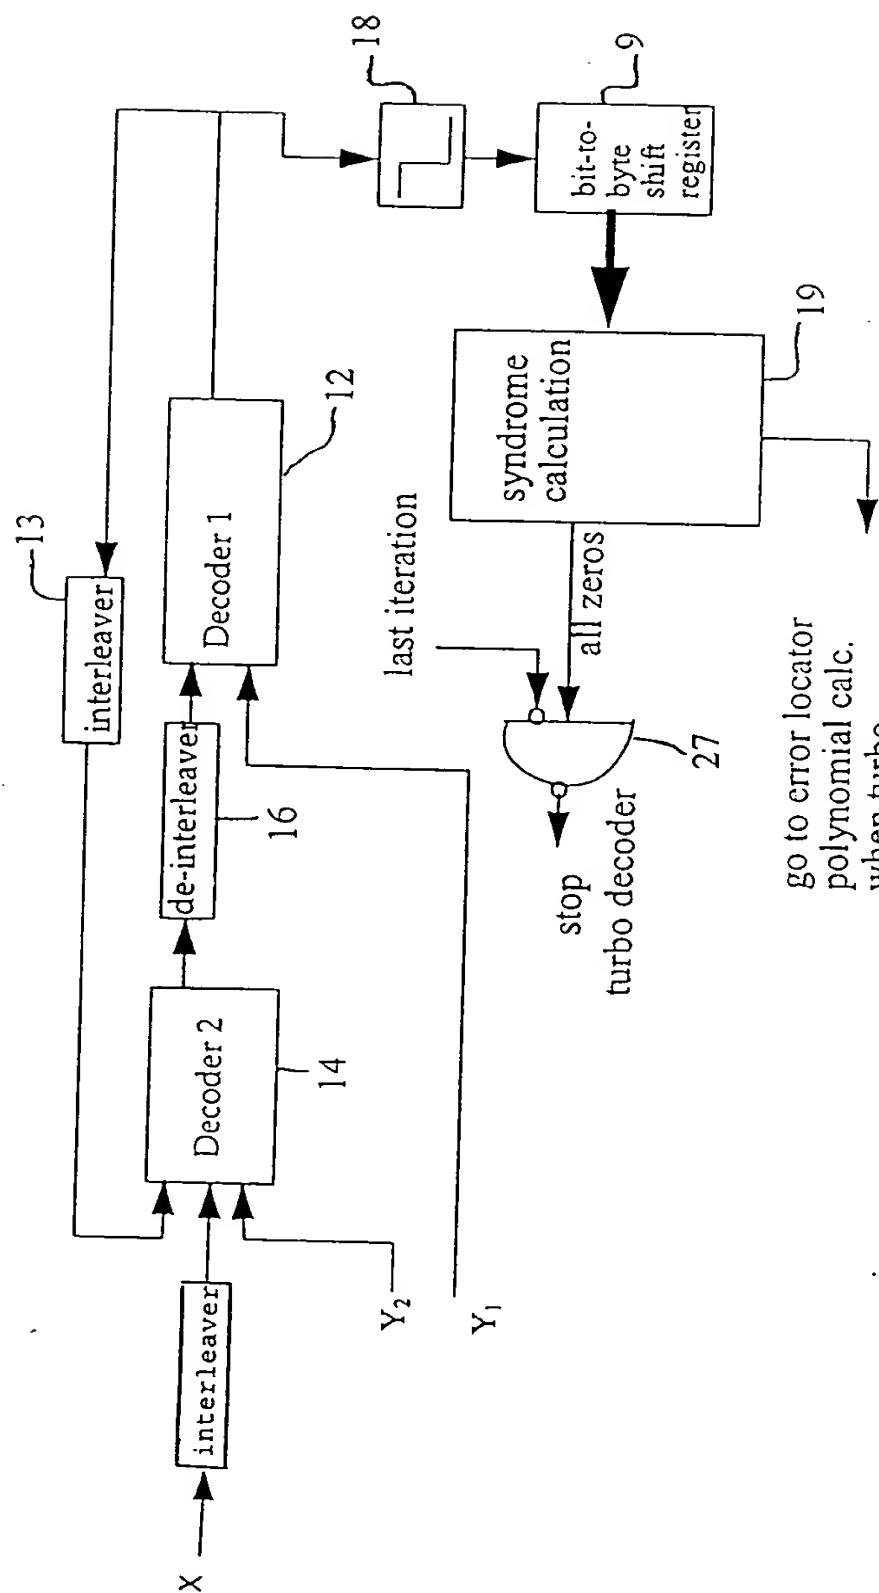


FIGURE 6

go to error locator
polynomial calc.
when turbo
decoder reaches its
maximum iteration

This Page Blank (uspto)

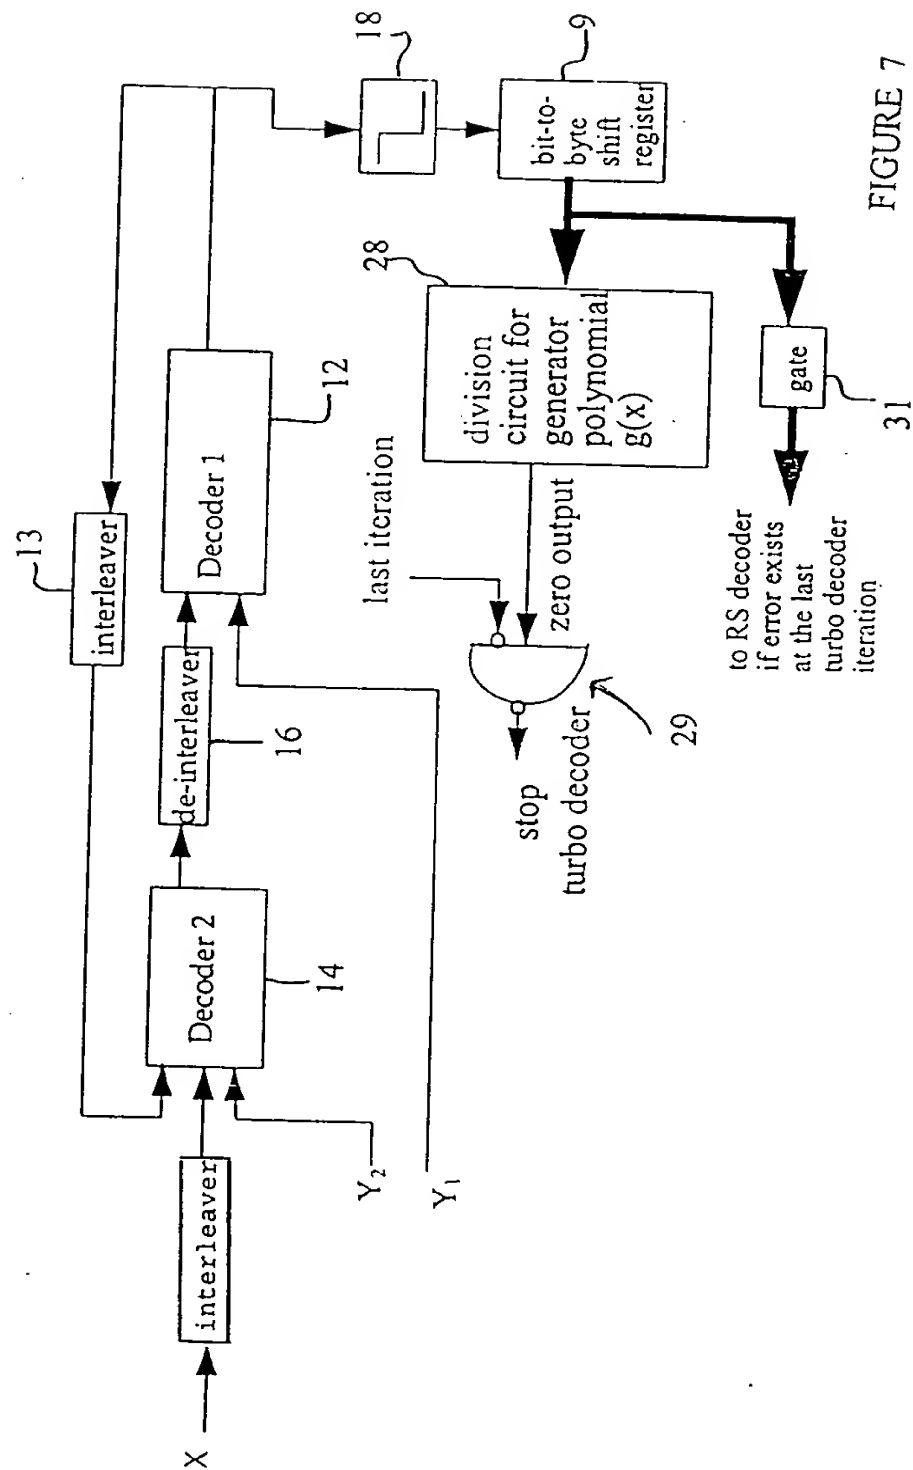

This Page Blank (uspto)